


## Ohm Metrics CM400 Series Continuous Monitors

### Single Wire Constant Ground Monitors

Continuously verifying the integrity of the ground system is critical to an effective ESD protection program. Using specialized impedance sensing technology, the CM400, CM410 and CM420 single wire monitoring products continuously check the total ground loop, including the operator, the wrist band and the coil cord. The systems are compatible with most wrist straps.

Models CM400  
CM410  
CM420  
*Workstation Monitors*

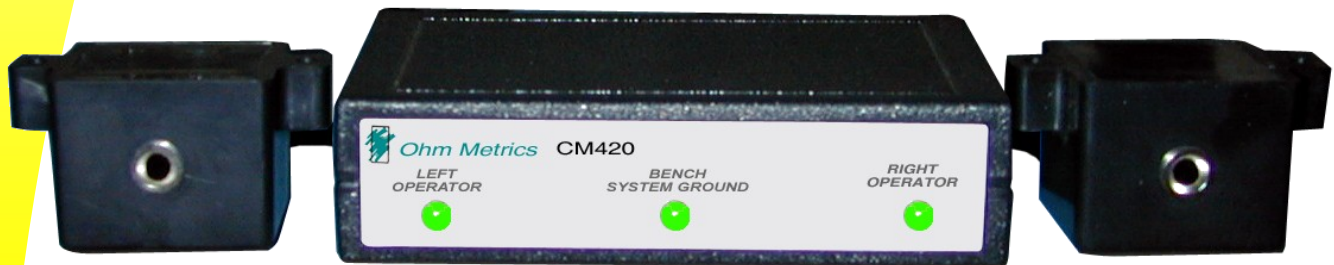

### Reliable, Repeatable Results

Accuracy and reliability are improved with the impedance technology incorporated into our constant monitors. False alarms disappear and adjustments are not necessary. Powered and grounded by an AC adapter, the system is fully automatic and begins sensing when a coil cord is plugged into the unit. A green light indicates a safe connection and a red light and audible alarm communicate an unsafe connection.

### Continuous Monitors pay for themselves

ESD-S1.1 notes that it is not necessary to test wrist straps daily when using constant monitoring systems. Higher value-added products especially benefit from the certainty of continuous monitoring. The CM400, CM410 and CM420 are perfect solutions for assuring workstation grounding protection.



This document is prepared for our customers as a service, and is to the best of our knowledge true and accurate. However, it is understood and agreed by the users of this document that we will accept no liability for the conclusions reached. Users of this document may therefore wish to perform additional testing before determining that products mentioned are suitable.



**Transforming Technologies,**

*Outstanding Alternatives in Static Control*

# Ohm Metrics Continuous Monitors

## Product Specifications

### Performance Specifications

Wrist strap open circuit voltage	0.7 VDC, $\pm 0.1$ VDC @ < 2mA
Mat open circuit voltage	5.0—7.5 VDC
Alarm indicators	Visual, audible (green: safe, red: unsafe)
Alarm set point	
Wrist strap	38 to 87pF (human body); with 1 megohm wrist strap resistance
Mat	6.5 megohm

### Unit monitoring capabilities

<b>CM400</b>	One wrist strap/person
<b>CM410</b>	One wrist strap + mat
<b>CM420</b>	Two wrist straps + mat
<b>CAL400, CAL410, CAL420</b>	Periodic verification tools for units

### Dimensions/Weight

<b>CM400</b>	0.88" H x 1.75" W x 1.25" D (2.24 x 4.45 x 3.18 cm) <b>7.4 oz</b>
<b>CM410</b>	1.00" H x 2.40" W x 2.30" D (2.54 x 6.10 x 5.84 cm) <b>7.8 oz</b>
<b>CM420</b>	1.00" H x 4.00" W x 2.40" D (2.54 x 10.16 x 6.10 cm) <b>12.4 oz</b>

Mounting  
Power Supply

Mounting materials included

### Power Supply

Input	120VAC—60hz
Output	12VDC, 200mA

Audible Alarm	10 beeps (max); 5 seconds
Adjustment	No adjustments required

### About Transforming Technologies

Transforming Technologies offers a wide range of unique and outstanding products to detect, protect, eliminate and monitor electrostatic charges. Our products are integral components of an effective static control program.

This document is prepared for our customers as a service, and is to the best of our knowledge true and accurate. However, it is understood and agreed by the users of this document that we will accept no liability for the conclusions reached. Users of this document may therefore wish to perform additional testing before determining that products mentioned are suitable.



Transforming Technologies, LLC

3407 Silica Rd.  
Sylvania, OH 43560

Phone: 1.419.841.9552

Fax: 1.419.841.3241

[www.transforming-technologies.com](http://www.transforming-technologies.com)