


DC1000 Series

Static Dissipative Document Protectors

Description

This product is designed for use in ESD controlled areas where there are ESD sensitive devices. All static dissipative sheet protectors are made from 2 mil, stable, amine-free, polypropylene clear film. Dissipative properties have an effective shelf life exceeding two years. This product is designed to hold 8.5" x 11" sheets.

Meets or exceeds requirements of ANSI ESD-S20.20.

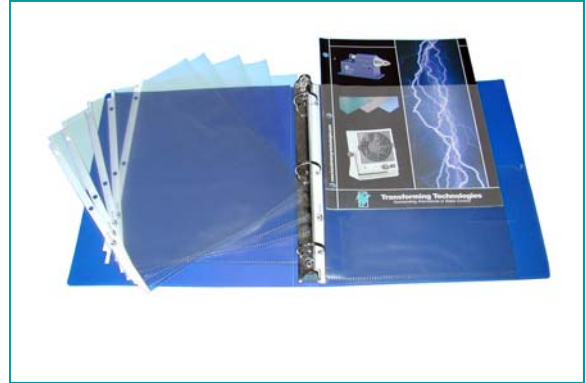

Sheet Protector, 2 mil, 8.625" x 11.25", 100/pack

Product Specifications

Electrical Properties:

Static Decay:	< 1 sec.	FTMS 101C, Method 4046
Surface Resistivity:	10e9 – 10e11	ASTM D-257

Specifications:

Polycarbonate Compatibility:	Yes	
Corrosivity:	Negligible	FTMS 101C method 3005
Ion Content:	Below Detection limits	Sodium, Fluoride, Phosphate, Sulfide
Tensile Strength:	2400 psi	ASTM D-882
Elongation at Break:	600%	ASTM D-882

Drawing Note 1: Sheet protector comes with holes for US standard three ring binder. White stripe, ESD symbol.

- Low charging and dissipative
- 3-hole punched for ring binders
- Edge hot stamped with ESD symbol, white stripe

Product Number

<u>Item Number</u>	<u>Description</u>
DC1185	Sheet Protector, 8.5" x 11", 100 per pack

This document is prepared for our customers as a service, and is to the best of our knowledge true and accurate. However, it is understood and agreed by the users of this document that we will accept no liability for the conclusions reached. Users of this document may therefore wish to perform additional testing before determining that products mentioned are suitable.



Transforming Technologies, LLC

3407 Silica Rd.
Sylvania, OH 43560

Phone: 1.419.841.9552

Fax: 1.419.841.3241

www.transforming-technologies.com

Outstanding Alternatives in Static Control