


VinylStat FM3

Solid Floor Runners

Description

A homogeneous polymer mix of durable PVC, VinylStat FM3 solid matting runners are designed to provide a static safe work area for a wide variety of applications. VinylStat FM3 floor runners are permanently static dissipative.

Meets or exceeds requirements of ANSI ESD-S20.20 and the recommendations of ESD 4.1.

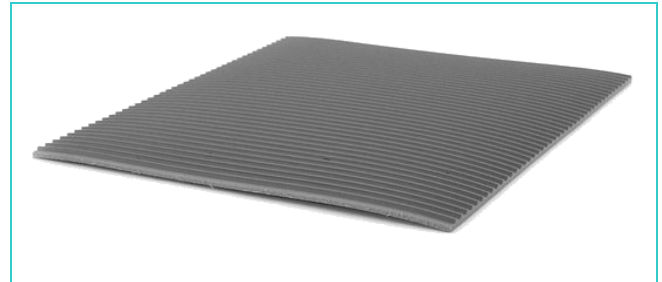

Product Specifications

<u>Physical Properties</u>	<u>Typical Value</u>
Color	Gray
Emboss Pattern	V-Groove emboss
Gauge	0.125"
Density	20 lb/ft ³ nominal
Tensile	700 lb/in minimum
Elongation	150% minimum
Tear	150 lb/in minimum
Durometer	80±5, Shore A

Electrical Properties

R_{TT} (ohm/square)@100v 1.0⁸ - 9 x10⁹Ω/sq

Suggested Service Temperature -20° F to + 160° F ⁽²⁾

Product Number

<u>Item Number</u>	<u>Description</u>
FM3 3672GY:	3 'x 60 ' floor runner
FM3 4872GY:	4 'x 60 ' floor runner

This document is prepared for our customers as a service, and is to the best of our knowledge true and accurate. However, it is understood and agreed by the users of this document that we will accept no liability for the conclusions reached. Users of this document may therefore wish to perform additional testing before determining that products mentioned are suitable.



Transforming Technologies, LLC

3407 Silica Rd.
Sylvania, OH 43560

Phone: 1.419.841.9552
Fax: 1.419.841.3241
www.transforming-technologies.com

Outstanding Alternatives in Static Control